

Conveyors & Elevators



Anglia Autoflow's new range of **Conveyors and Elevators** benefits from a heavy duty '**Easy-clean**' open type construction using food grade plastics and stainless steel, all finished to a very high standard and designed to eliminate bug traps.

A wide range of options including:

Sealed edge belting in various colours, including high visibility blue.

Quick release (belt tension) mechanism to reduce cleaning time.


Cantilever leg allowing the complete conveyor belt to be removed.

Small diameter transfers of the roller or 'knife edge' type.

Product ploughs powered belt, pneumatic 'flipper' etc.



STANDARD RANGE (others available on request)									
Belt Widths (mm)		200		300		500		600	
Motorised Drum Drive	Drum Diameters (mm)	114		114		165		165	
	Belt Speeds (m/min)	9 or 16		9 or 16		10 or 15		10 or 15	
Variable speed controlled by an inverter is optional									
Gearmotor & Pulley Drive	Pulley Diameters (mm)	114	165	114	165	114	165	114	165
	Belt Speeds (m/min)	11 or 15	19 or 24	11 or 15	19 or 24	11 or 15	19 or 24	11 or 15	19 or 24
Variable speed controlled by an inverter is optional									

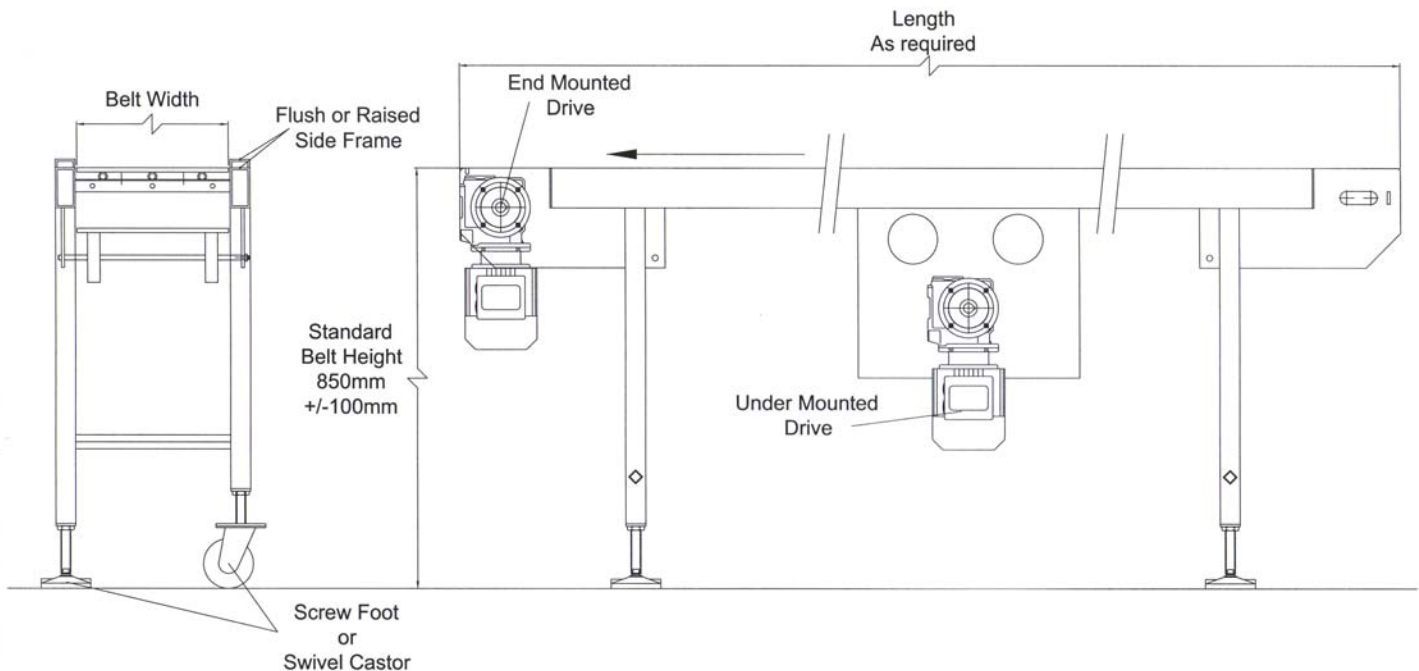

Tel: +44 (0) 1379 651031
 Fax: +44 (0) 1379 652832
 Email: sales@aaflow.com
 Web: www.aaflow.com